



KONICA MINOLTA

MGI JETVARNISH 3DS & iFOIL S DATASHEET

- ✓ Digital spot UV coating and hot foil stamping on different page sizes up to 36,4 x 102 cm
- ✓ For Variable Data Foiling

Don't limit yourself to beautifully printed jobs any longer – it's time to offer your customers more value and creativity! The JETVARNISH 3DS turns printed jobs into spectacular and irresistible print products that will immediately catch the attention of your customers. With the JETVARNISH 3DS, you will find it easy to spot coat digital prints, highlight defined areas, or add 3D effects – all of which enables you to offer attractive print products that are more vivid and tactile. The combination with the inline hotfoiling module iFOIL S gives you a glamorous effect.



MGI
Digital Technology

YOUR ADVANTAGES WITH THE JETVARNISH 3DS & iFOIL S

ECO-FRIENDLY IN-LINE LED DRYER

- On-the-fly drying & curing with integrated LEDs
- No additional drying time required
- Ozone-free and without heat thanks to LED technology
- Low power consumption

KONICA MINOLTA PRINT HEADS

- Exclusive MGI's inkjet technology
- With genuine Konica Minolta piezoelectronic printheads
- Produce any line thickness from 0.5 mm to as wide as the sheet

DIGITAL ADVANTAGES

- Ideal for lucrative short and medium print runs
- Fast make-ready
- No plates or screens needed
- All that's required is a digital 5th colour mask
- Wide range of substrates possible




VARNISH DIGITAL AND OFFSET PRINTS

- Varnishing on toner without lamination
- Varnishing on offset prints
- Accurate sheet-to-sheet registration with the AIS SmartScanner technology
- Quick and easy setup supports digital printing business model

VARIABLE VARNISH THICKNESS

- Can be adapted to individual customer needs
- Maximum 3D effect: up to 232 µm*
- Minimum thickness (on laminated surfaces): from 21 µm

* with the Twin Bar Option

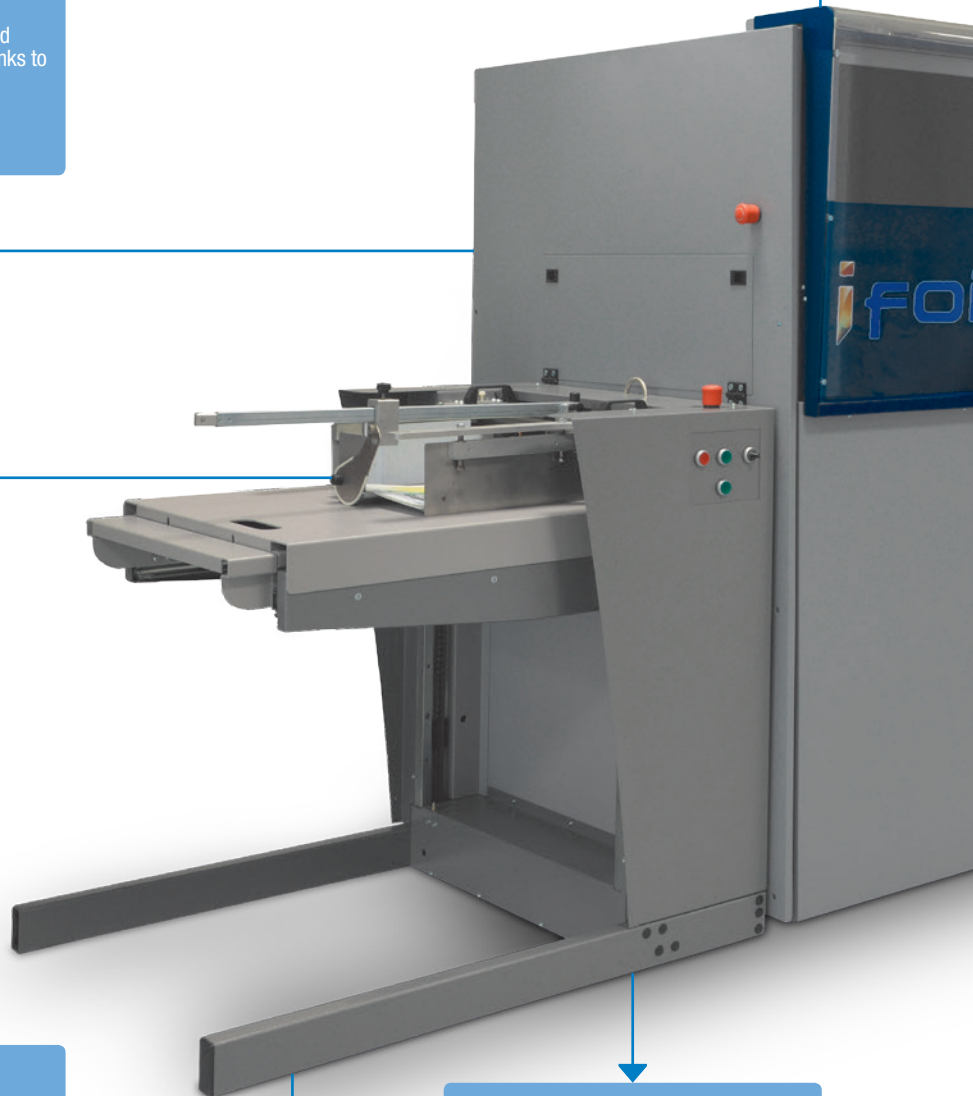

SOFTWARE SUITE INCLUDED

- On-the-fly job manager
- Reprint function
- Image editor
- Catalogue of different patterns
- Cost calculation and export of data
- For intuitive operation
- Saves time and money



AIS SCANNER


- Full page scanner
- For on the fly coating registration from sheet to sheet
- For on-the-fly paper skew, shift, contraction and stretch adjustment

VARIABLE DATA OPTION

- Barcode reader option available
- For Variable Data Printing
- For spot UV coating without manual intervention

VARIABLE DATA FOILING

- Short set-up time of jobs
- For personalised foil applications
- High flexibility
- On digital and offset prints
- Fast make-ready
- Exclusive look and feel

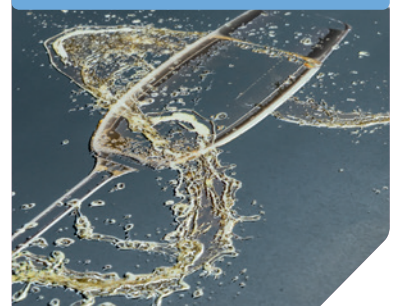

HIGH PRODUCTIVITY WITH SINGLE PASS PRINTING

- Up to 2,077 A3 sheets/hour with varnish thickness of 21 µm (2D/flat mode)
- 1,468 A3 sheets/hour with varnish thickness of 43 µm (3D mode)
- Up to 547 A3 sheets/hour with varnish thickness of 116 µm (3D mode)

ENVIRONMENTALLY FRIENDLY

- Ink is in a closed/circuit system
- No ink and varnish residues
- No cleaning in-between jobs
- No material waste between jobs
- Reduced paper, varnish and electrical consumption



Technical specifications

PRODUCT SPECIFICATIONS - JETVARNISH 3DS

Printing technology	MGI's exclusive inkjet engine technology Drop-on-Demand (DoD) technology Piezoelectric printheads, developed and manufactured by Konica Minolta Single pass printing Flexible & scalable printing architecture
Coating thicknesses	Depending on your file, the inks used and the type of surface of your sheet, the coating thickness can vary. On laminated and aqueous coating: 21 µm – 232 µm* for 3D raised effects and tactile finish. On toner and coated paper: 30 µm – 116 µm/232* µm for 3D raised effects and a tactile finish
Production speed	In 2D/flat mode: Up to 2,077 A3 sheets per hour (with 21 µm) In 3D/raised mode: Up to 1,468 A3 sheets per hour (with 43 µm) Up to 547 A3 sheets per hour (with 116 micron)
Registration	SmartScanner coupled with Artificial Intelligence (AIS) for fully real-time automated sheet-to-sheet registration process. No crop mark required.
Formats	Min. 21 x 29.7 cm / 8 x 11.8" Max. 36.4 x 102 cm / 14.33 x 40.15" Max. Printable Width 35.3 cm
Substrate thickness	Min: 135 gsm and not less than 150 µm or 6 mil before printing & lamination Max: 450 gsm and not more than 450 µm or 18 mil before printing & lamination Motorized height-adjustment print heads
Substrates**	Printing on most matte or glossy laminated surfaces, with or without aqueous coating, layered paper, plastic, PVC and other coated materials.
Varnish on toner	Spot 3DS coat directly onto most digital prints with no lamination or coating required.
UV coatings and capacity	3D varnish delivered with a 10-litre tank capacity
High capacity Automatic feeder	Feeder able to handle a paper pile up to 30 cm 2,500 sheets at 135 gsm
High pile output stacker	Stacker able to handle a paper pile up to 30 cm 2,500 sheets at 135 gsm
Paper path	100% flat paper path; Vacuum feed system Air feed system; Automatic double sheet detection In-line LED dryer "On-the-fly" drying & curing via integrated LED Spot Coated sheets can be immediately finished or handled, no additional drying time required

PRODUCT SPECIFICATIONS - iFOIL S

Production speed	Up to 2,298 A3 sheet size per hour (or 20 meters/min)
Formats	Min: 21 x 29.7 cm Max: 36.4 x 102 cm
Hot foil stamping area	32 x 102 cm
Substrate thickness	Min: 135 gsm and not less than 150 µm/6 mil before printing and lamination Max: 450 gsm and not more than 450 µm/18 mil before printing and lamination Motorised height-adjustment print heads
Substrates	Most matte or glossy laminated surfaces, with or without aqueous coating, layered paper, plastic, PVC and other coated materials Most digital prints without any lamination or coating

Front end system	Dedicated PC; CPU + touch-screen + keyboard/mouse Ethernet connection 10/100/1000 BT (RJ 45) Built-in Application Software Suite Comprehensive job queue management Predictive printing cost calculator (coating consumption) Dedicated image editor to do local and fast image editing prior to production
Maintenance & remote technical support	Daily maintenance completed in less than 10 minutes Majority of procedures are automated Automatic cleaning system From cold start to production in less than 10 minutes Remote troubleshooting & support via included video/web camera (high speed internet connection required)
Operator panel Options	Integrated user-friendly LCD touch-screen Twin bar option: 2 nd print engine to increase 3D print speed and coating thickness, up to 232 µm variable data option. Variable data option: Complete system including RIP, barcode reader and MGI software to automatize the association between a pre-printed barcode and its specific spot coating file
Dimensions (L x W x H)	4.26 (5.47*) x 1.14 x 1.80 meter (with the longest paper extensions installed) 1 metre clearance required on all 4 sides
Weight	± 1,100 kg
Electrical requirements	7.5 kW (32 A) at 220–240 V; 2 plug CEE/IP44 32A (1P+N+E)
Operating	Temperature: 18 to 30°C Environment Relative humidity: between 35 – 55% (no condensation)
Respecting the environment	Eliminates resource waste (wasted electricity, paper and varnish) No plates (offset) or screens (screen printing) No cleanup or preparation between jobs Drastic reduction in amount of consumables and use of bulk packaging. Coating without volatile solvent.

The default sheet format is A3, unless otherwise stated

1) with an additional option installed

2) speed will vary according to printing parameter used

3) confirm substrate/toner compatibility with KM

* With the Twin Bar

** The used substrate needs to be either coated or laminated. Otherwise the media is absorbing the varnish and the desired effect might get lost.

Foil rolls	Standard internal core: 1 inch - Min./Max. widths: 10/36 cm 400 meter length (average) Up to 2 rolls loaded simultaneously on the same holder 3" internal core is optional
Embossing	From 21 µm to 116 µm thickness From 21 µm to 232 µm thickness (Twin Bar optional)
Compatibility	Online module that connects to all JETVARNISH 3DS
Dimensions (L x W x H)	2.09 x 1.24 x 1.80 meter
Weight	± 850 kg
Electrical requirements	7.5 kW (32 A) at 220–240 V – 50/60 Hz 2 plugs CEE/IP44 32A (1P+N+E)
Options	High capacity stacker for paper stacking up to 60 cm paper height 3" core inch foil holder

– All specifications refer to A4-size paper of 135 gsm quality.

– The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.

– The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4).

– The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

– Some of the product illustrations contain optional accessories.

– Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.

– Konica Minolta does not warrant that any prices or specifications mentioned will be error-free.

– All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.